

Belden Style

Standard Copper Cable

CQR

First choice for quality

A cable designed by CQR to meet all aspects of the European Construction Product Regulation (CPR) EN50575.

This cable has been independently tested and certified by an accredited test facility and has been awarded a CPR Euro classification.


CQR offer the Installer, Specifier and End User a quality cabling solution and piece of mind that the product will perform to specification in the event of a fire.

DoP Certificates available online for download



- Typically used for security
- 7 x 0.194mm Tinned Copper
- Sheathed in Low Smoke & Fume
- Screened 6, 8 or 10 cores
- Manufactured to BS4737-3.30:2015 Type 2
- Fully compliant with EN50575 'CPR'

Available Cores

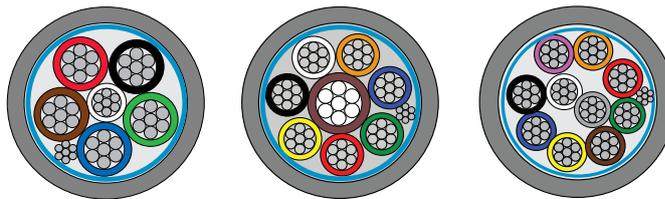

Product codes

Code	Description
CABS6/GY/LSF/100	Belden Style 9536 6 Core Screened 100mtrs
CABS8/GY/LSF/100	Belden Style 9538 8 Core Screened 100mtrs
CABS8/GY/LSF/300	Belden Style 9538 8 Core Screened 100mtrs
CABS10/GY/LSF/100	Belden Style 9540 10 Core Screened 100mtrs

Other cable lengths and colour available
See www.cqr.co.uk for details

Technical data

Core:	7 x 0.194mm
Resistance:	83.3 Ohms/Km
AWG:	24
Conductor Material:	Tinned Copper
Conductor area:	0.207mm ²
Max voltage:	50 volts
Sheathing:	LSF
Core insulation:	PVC
Operating temp:	70°C
Euroclass Rating:	E _{ca}
SCREENED CABLE	
Drain wire:	Soft tinned copper
Screen:	Alu/Polyester Foil

rev. 3-11/2020



www.cqr.co.uk

info@cqr.co.uk

Sales: +(0)151 606 1000 Tech: +(0)151 606 6311

CQR Security Ltd, 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK

Over 30 Years experience of alarm cable manufacturing in the United Kingdom

