



SPEL
Safety in mind



PICTOR
PRODUCT DATA SHEET

PICTOR



ULTRA-SLIM
POLYCARBONATE
EMERGENCY
EXIT SIGN

FEATURES

- IDEAL FOR USE IN ESCAPE ROUTES AND FINAL EXITS.
- ULTRA-SLIM INJECTION-MOULDED WHITE POLYCARBONATE CONSTRUCTION.
- LED PANEL ILLUMINATES DIRECTLY BELOW THE SIGN TO THE ESCAPE ROUTE AND DOOR THRESHOLD.
- CAN BE WIRED AS EITHER 3 HOURS MAINTAINED OR 3 HOURS NON-MAINTAINED EMERGENCY MODE.
- PUSH-FIT TERMINALS FOR EASIER AND QUICKER INSTALLATION.
- SUPPLIED WITH ARROW UP EN7010 FORMAT (L17EB/7010/PC) ACRYLIC LEGEND PANEL (OTHER ARROW DIRECTIONS AVAILABLE TO ORDER).
- EASY MAINTENANCE VIA CONVENIENT REMOVABLE FRONT FRAME.
- HIGHLY EFFICIENT LED LIGHT SOURCE.
- KEYHOLE SLOTS FOR EASE OF INSTALLATION.
- 33M VIEWING DISTANCE.
- 3 YEARS PRODUCT WARRANTY.
- 54,000 HOURS LED LIFE.
- CRI 80 (MINIMUM).
- 6500K COLOUR TEMPERATURE.

PRODUCT CODE

CODE	WATTS	EMERGENCY DURATION	MAINS LUMENS	EMERGENCY LUMENS
PC/LED/M3	4W	3 HOURS		

VIEWING DISTANCE

33 METRES



EMERGENCY
EXIT SIGN



LED LIGHT
SOURCE




IP20 INGRESS
RATING




3 YEARS
WARRANTY

PRODUCT DATA SHEET

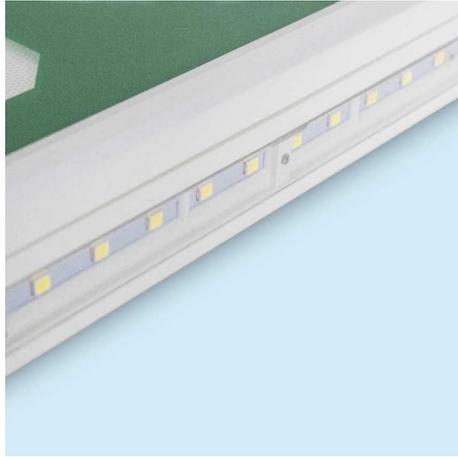


DIMENSIONS

FRONT VIEW

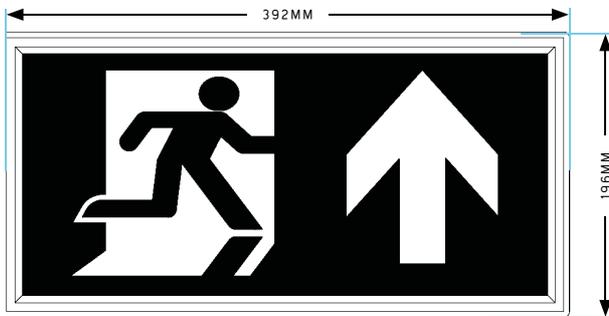

SIDE VIEW

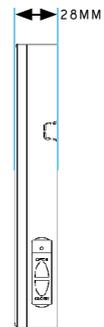

1KG

WEIGHT

LEGEND OPTIONS



SUFFIX L16EB/7010/PC



L17EB/7010/PC*
*SUPPLIED AS STANDARD



SUFFIX L19EB/7010/PC



SUFFIX L20EB/7010/PC

SPECIFICATION

GENERAL SPECIFICATION

CE MARK COMPLIANCE:
CE MARKED, REACH, ROHS & UKCA
COMPLIANT

MANUFACTURED TO STANDARDS:
IN ACCORDANCE WITH
BS60598-2-22

MANUFACTURING QUALITY
APPROVAL:
ISO 9001:2015

CONSTRUCTION

BODY CONSTRUCTION:
INJECTION MOULDED
POLYCARBONATE

PROTECTION DEGREE:
IP20

INSULATION CLASS:
CLASS II

LEGEND MATERIAL:
ACRYLIC

CABLING:
90°C SINGLE CORE 0.8MM TO
BS6500 GRADE 5

SUPPLY VOLTAGE:
220/240V AC 50/60HZ

CONTROL GEAR

DESIGN/MANUFACTURE:
DESIGNED AND MANUFACTURED IN
ACCORDANCE WITH BS EN61347-2-7,
BS EN61347-2-13, BS EN62384,
BS EN55015, BS EN61000-3-2 AND
BS EN61000-3-3

BATTERIES:
SUITABLE FOR USE WITH NICAD
BATTERY TECHNOLOGY

LED'S

LED TYPE:
2835 SMT MID POWER
LED COLOUR TEMPERATURE:
6500K

CRI (MINIMUM):
80

LED LIFETIME:
TM21 L70 > 54,000 HOURS



SPEL
Safety in mind

HEAD OFFICE

SPEL EMERGENCY SAFETY
ORBIK HOUSE
NORTHGATE WAY
ALDRIDGE
WALSALL
WEST MIDLANDS

TEL: 01922 743515
EMAIL: UKSALES@ORBIK.CO.UK



WWW.ORBIK.CO.UK